


MS1261

RF & MICROWAVE TRANSISTORS VHF MOBILE APPLICATIONS

• Features

- 175 MHz
- 12.5 VOLTS
- P_{OUT} = 15 WATTS
- G_p = 12 dB MINIMUM
- INPUT IMPEDANCE MATCHING
- COMMON EMITTER CONFIGURATION




.280 4L STUD (M122)
epoxy sealed

DESCRIPTION:

The MS1261 is a Class C 12.5V epitaxial silicon NPN planar transistor designed primarily for UHF communications. This device utilizes a gold metalized, emitter ballasted die geometry for superior reliability and infinite VSWR capability.

PIN CONNECTION

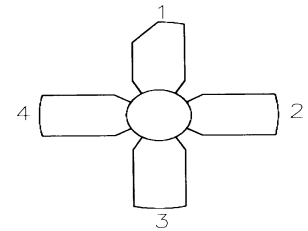

1. Collector 3. Base
2. Emitter 4. Emitter

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	36	V
V _{CEO}	Collector-Emitter Voltage	18	V
V _{CES}	Collector-Emitter Voltage	36	V
V _{EBO}	Emitter-Base Voltage	4.0	V
I _C	Device Current	2.5	A
P _{DISS}	Power Dissipation	34	W
T _J	Junction Temperature	+200	°C
T _{STG}	Storage Temperature	-65 to +150	°C

Thermal Data

R _{TH(J-C)}	Thermal Resistance Junction-case	8.75	°C/W
----------------------	----------------------------------	------	------

ELECTRICAL SPECIFICATIONS (T_{case} = 25°C)

STATIC

Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
BV _{CES}	I _C = 50 mA	V _{BE} = 0V	36	---	---	V
BV _{CEO}	I _C = 15 mA		18	---	---	V
BV _{EBO}	I _E = 2.5 mA	I _C = 0mA	4.0	---	---	V
I _{CBO}	V _{CE} = 15 V	I _E = 0mA	---	---	1	mA
H _{FE}	V _{CE} = 5 V	I _C = 250mA	20	---	200	---

DYNAMIC

Symbol	Test Conditions			Value			Unit
				Min.	Typ.	Max.	
P _{OUT}	f = 175 MHz	P _{IN} = 1W	V _{CE} = 12.5V	15	---	---	W
η _c	f = 175 MHz	P _{IN} = 1W	V _{CE} = 12.5V	60	---	---	%
G _p	f = 175 MHz	P _{IN} = 1W	V _{CE} = 12.5V	12	---	---	dB
C _{OB}	f = 1 MHz	V _{CB} = 12.5V		---	---	45	pf


IMPEDANCE DATA

FREQ	Z _{IN} (Ω)	Z _{CL} (Ω)
175 MHz	1.2 - j0.4	5.2 + j1.1

P_{OUT} = 15W
V_{CC} = 12.5V

PACKAGE MECHANICAL DATA

PACKAGE STYLE M122

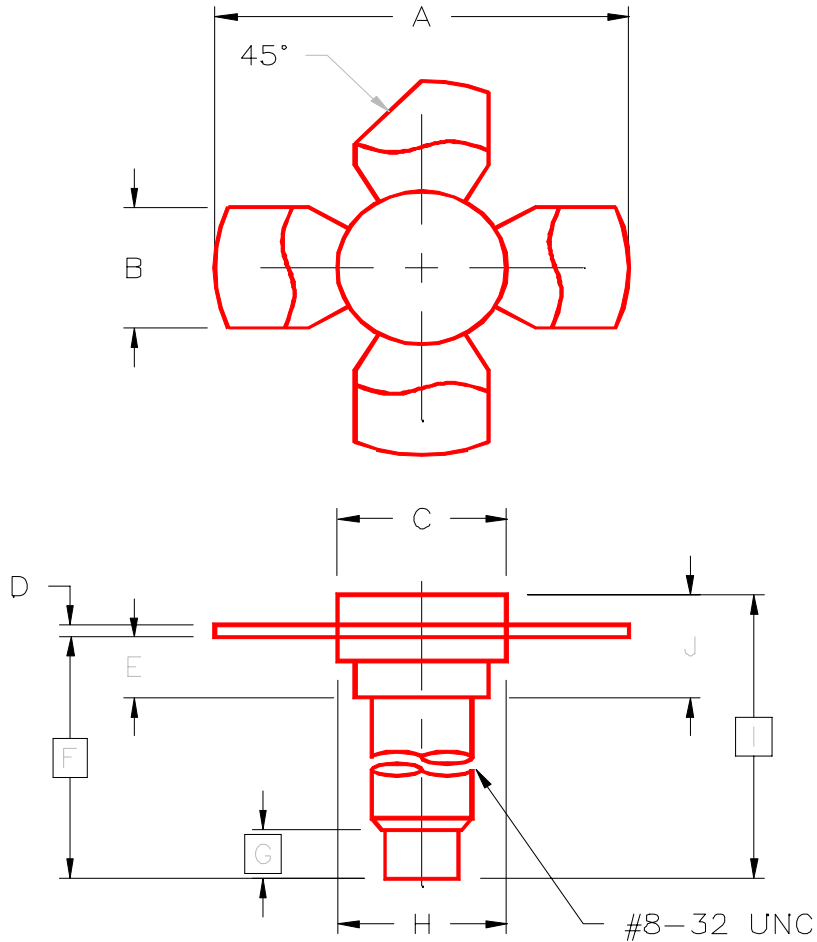

	MINIMUM INCHES/MM	MAXIMUM INCHES/MM		MINIMUM INCHES/MM	MAXIMUM INCHES/MM
A	1.010/25,65	1.055/26,80	I	.640/16,26	
B	.220/5,59	.230/5,84	J	.175/4,45	.217/5,51
C	.270/6,86	.285/7,24			
D	.003/0,08	.007/0,18			
E	.117/2,97	.137/3,48			
F	.572/14,53				
G	.130/3,30				
H	.275/6,99	.285/7,24			