


- NOTES:
1. UNLESS OTHERWISE INDICATED ALL RESISTANCE VALUES ARE IN OHMS ; WATTAGE RATING NOTED.
  2. UNLESS OTHERWISE INDICATED ALL CAPACITANCE VALUES ARE IN MICROFARADS.
  3. FOR SSB OPERATION, DISCONNECT JUMPER FROM POINT "A" AND CONNECT IT TO POINT "B".
  4. DRAWING AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
  5. ○ INDICATES NUMBERED CONNECTIONS ON P.C. BOARD.

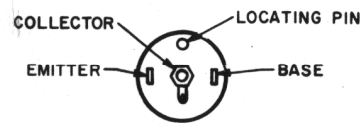

|  |          |                          |                    |
|--|----------|--------------------------|--------------------|
| DWN C.C.   | CHK L.P. | APPVD <i>[Signature]</i> | DATE 10-12-69      |
| MODEL BR-2906<br>SCHEMATIC DIAGRAM                               |          |                          |                    |
| SONAR RADIO CORPORATION<br>73 WORTMAN AVE., BROOKLYN, N.Y. 11207 |          |                          |                    |
|  |          |                          | DRAWING NO. C-1453 |

TRANSISTOR BASE DIAGRAM Q3, Q4