


J.C. PENNY 981-6203 (861 CHIP)

For max. mod clip D7 located next to red light emitting diode in front of audio transformer.

For 100% modulation only, clip one end of D7 and insert a 3K resistor in series:

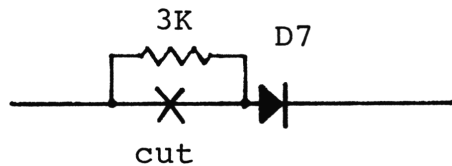

Peak T13 & T14 for maximum RF output.

Decimal Equivalents of Number Drills for PC Work in Inches

80	.0135	64	.0360
79	.0145	63	.0370
78	.0160	62	.0380
77	.0180	61	.0390
76	.0200	60	.0400
75	.0210	59	.0410
74	.0225	58	.0420
73	.0240	57	.0430
72	.0250	56	.0465
71	.0260	55	.0520
70	.0280	54	.0550
69	.0292	53	.0595
68	.0310	52	.0635
67	.0320	51	.0670
66	.0330	50	.0700
65	.0350		