


IMPORTANT: KEEP LEADS AS SHORT AS POSSIBLE. USE ONLY SOLID WIRE AGW20 TINNED COPPER WIRE.

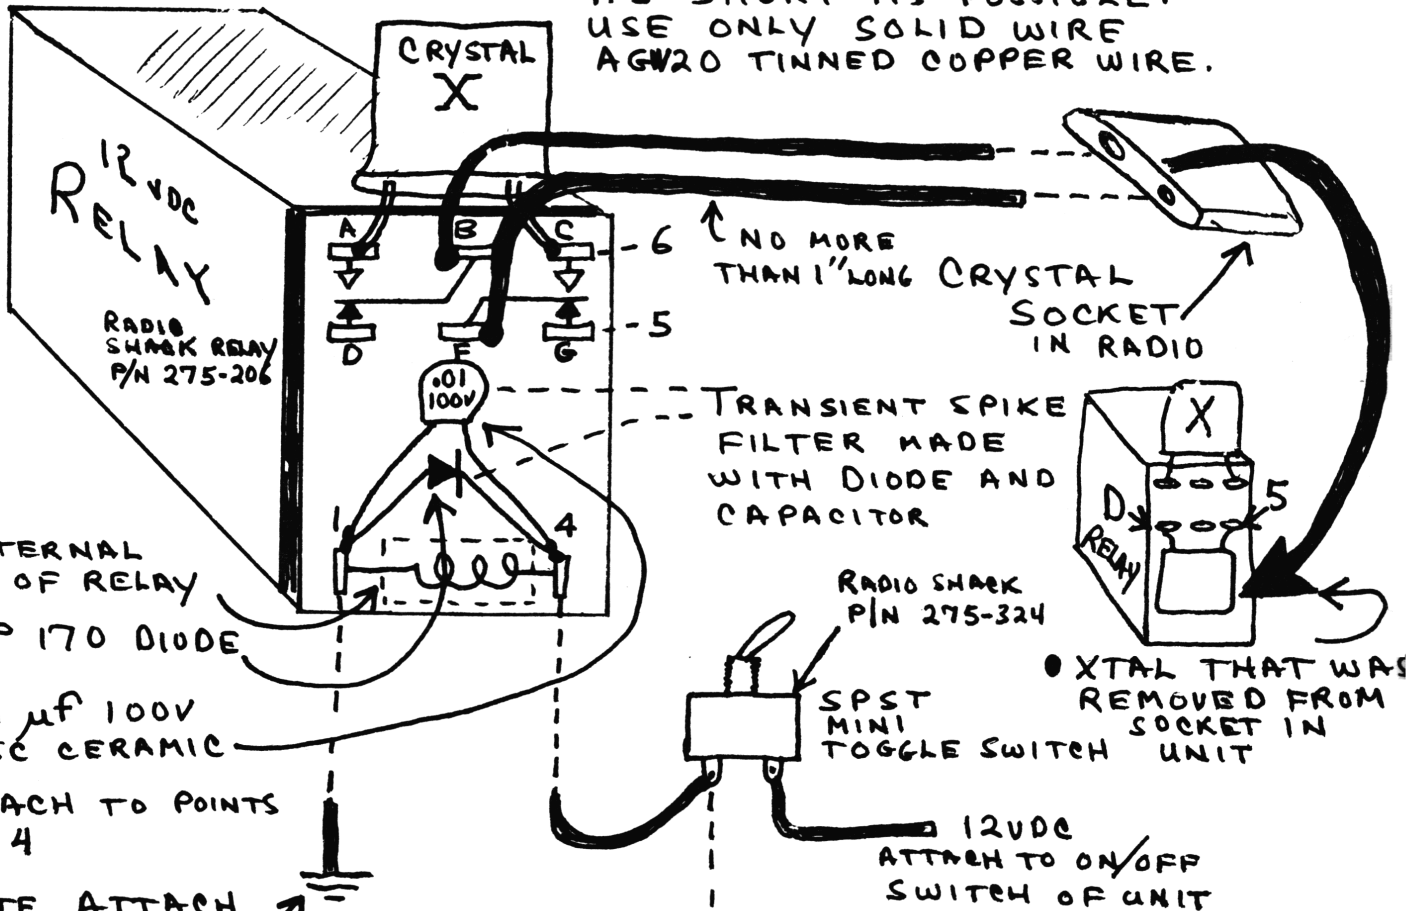

- INTERNAL COIL OF RELAY
- HEP 170 DIODE
- .01  $\mu$ F 100V DISC CERAMIC
- ATTACH TO POINTS 1 & 4

NOTE ATTACH TO PRINTED CIRCUIT GROUND  
 (IMPORTANT, NOTE PRINTED CIRCUIT GROUND IS NOT THE SAME AS CHASSIS GROUND!)

- DRILL HOLE FOR LED ATTACH WITH PLASTIC CEMENT IN A CONVENIENT LOCATION ON FACE PLATE.
- ATTACH XTAL MODULE THAT YOU HAVE BUILT DIRECTLY ABOVE XTAL SOCKET. SECURE WITH SILICON SEAL.

