

SPECIFIC RADIO TUNE-UPS (Cont'd) :

Midland 5001 (77-005) PLL03A:

RX: RV1; Sq. Range.
RV3; S Meter


TX: Peak T2, T3, T4, L5, L10.
RV2; AMC
L2; RF Power Meter.
RV502; SWR
RV501; A.W.I.

Midland 77-101C LC7120:

RX: RV101; Sq. Range.
RV103; S Meter

TX: Peak L301, L302, L303, L304, L305 and L306.
RV201; AMC or clip D204.
RV202; RF Power Meter.

Zapper install @ C205, as shown below. L203 is VCO coil.
D201 may be replaced with Super Diode.

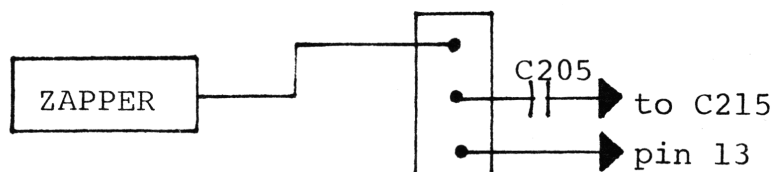

Midland 77-824B TC9106P:

RX: VR1; If Gain.
VR2; SQ Range.
VR3; S Meter.

TX: Adjust L16, L15, L12 for max. L9 is TVI filter.
VR5; AMC or Remove TR19.
VR4; TX Pwr. Meter.
L17 VCO Coil.