


Monitor Receiver

1. Check the +10 VDC regulated line.
2. Refer to the component layout diagram and proceed with section and stage troubleshooting to isolate the defective component.
3. Remove and replace defective component and refer to the alignment section if it is determined that re-alignment is necessary.

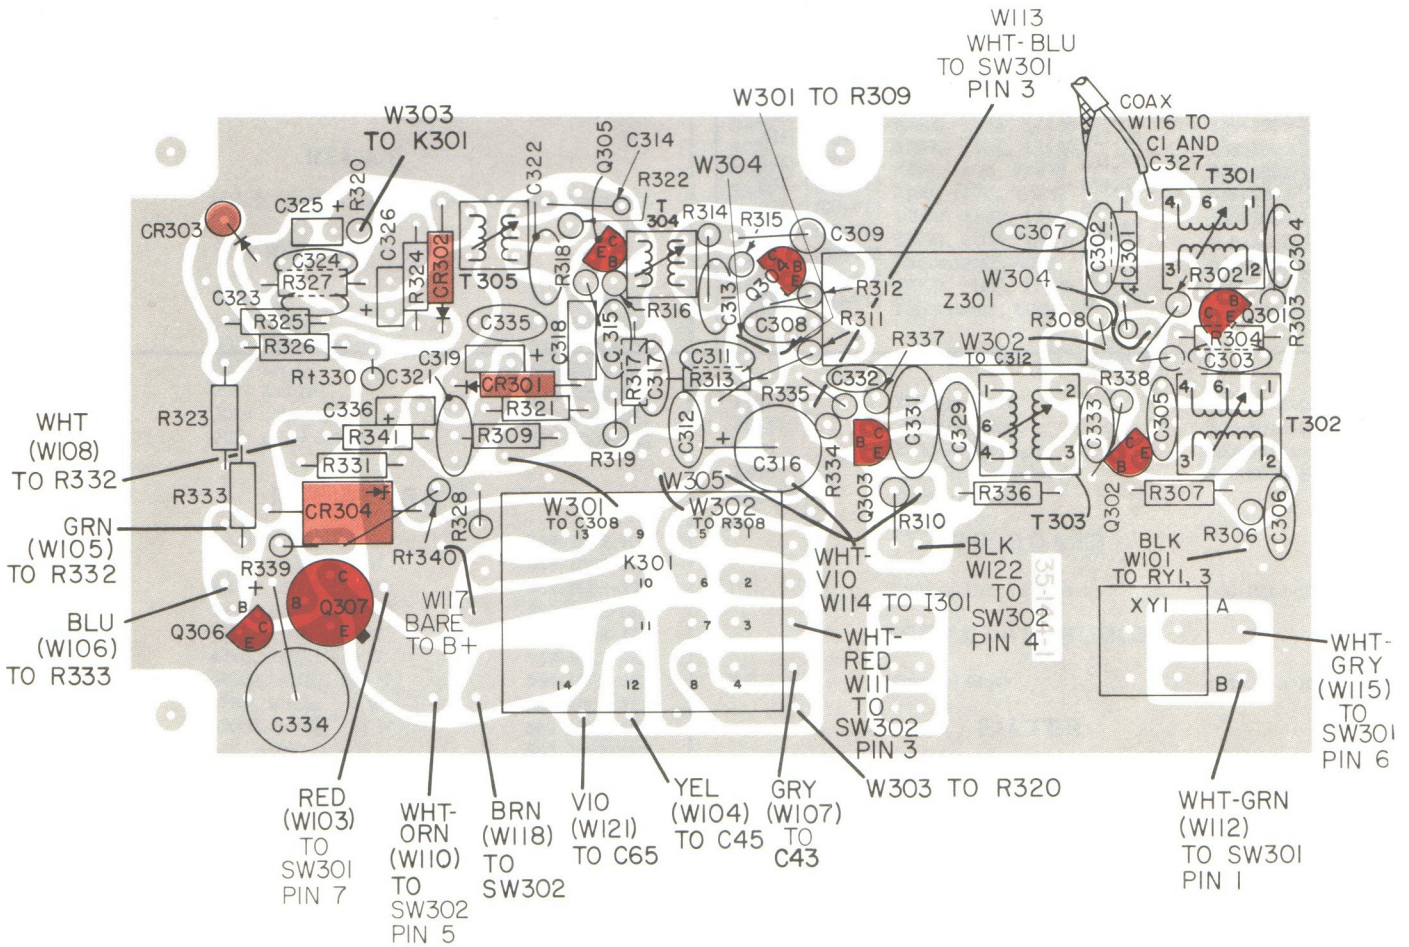

MONITOR RECEIVER PRINTED CIRCUIT BOARD COMPONENTS LAYOUT
 (AS VIEWED FROM THE SOLDER SIDE OF THE BOARD)