


10 METER BROWNING GOLDEN EAGLE MARK III MOD

PARTS LIST:

- (1) One switch kit with xtals
- (2) Adjustable slider coil

1-Turn the unit upside down and remove the bottom cover from transmitter. Locate CR6, CR5, and CR4. Remove them from the set one at a time; so you will not mix them up. Then install them on the switch. You must use a heat sink on the xtal leads so you will not damage the xtals. Install them as per drawing.

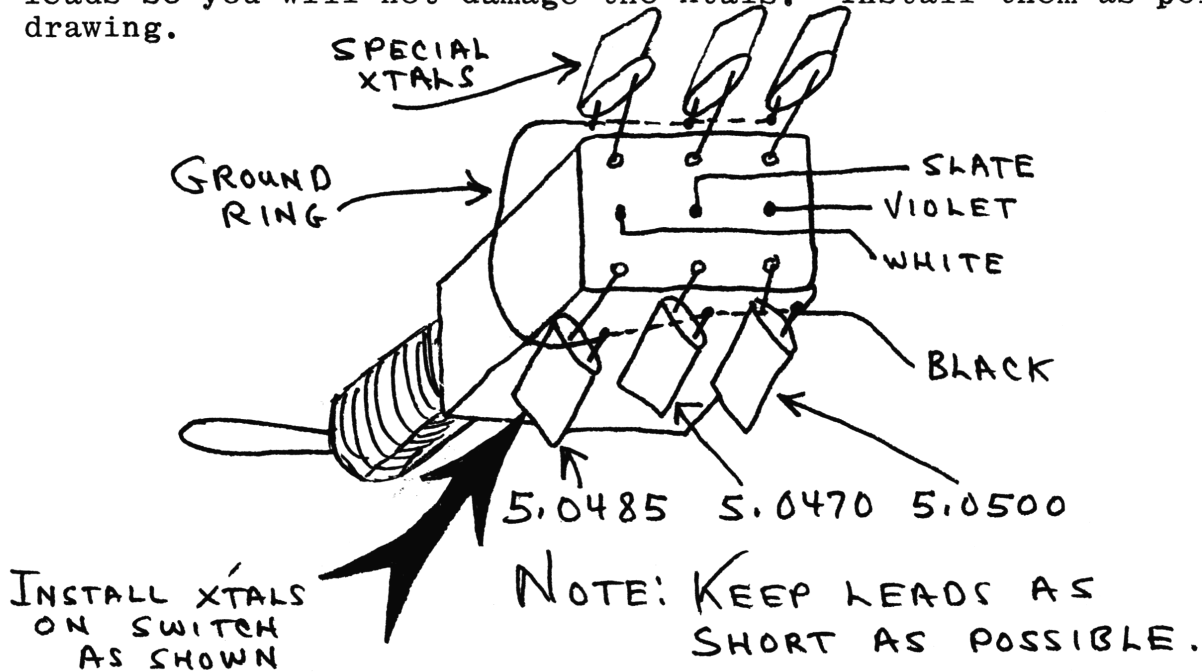

2-Mount your new switch in a convenient position thru the front panel.

FIGURE #2

3-Mount the new slider coil in the ground side of the VFO capacitor on the front panel. The coil may be adjusted for the best slide.

4-Peak up +6 for best results overall. This is the 5KHZ mixer.

FIGURE #3

5-You may change L5 and L7 for best slider results.

The new channel will be from channel 1, (27.265) to channel 23, (27.555). THIS COMPLETES THE MODIFICATION. REINSTALL IN CABINET.

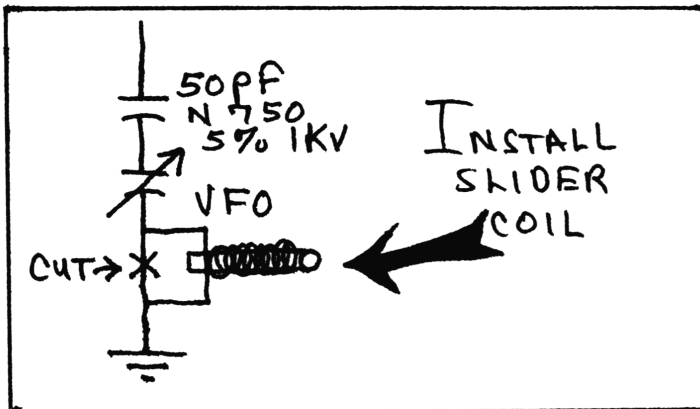


FIG. 2

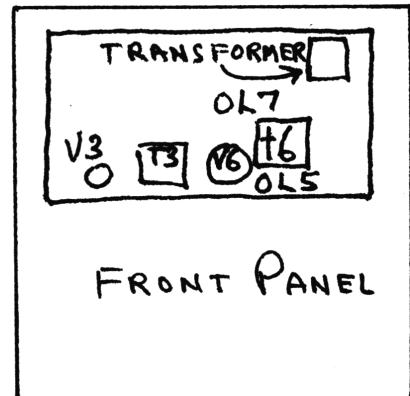


FIG 3