




SCHEMATIC DIAGRAM

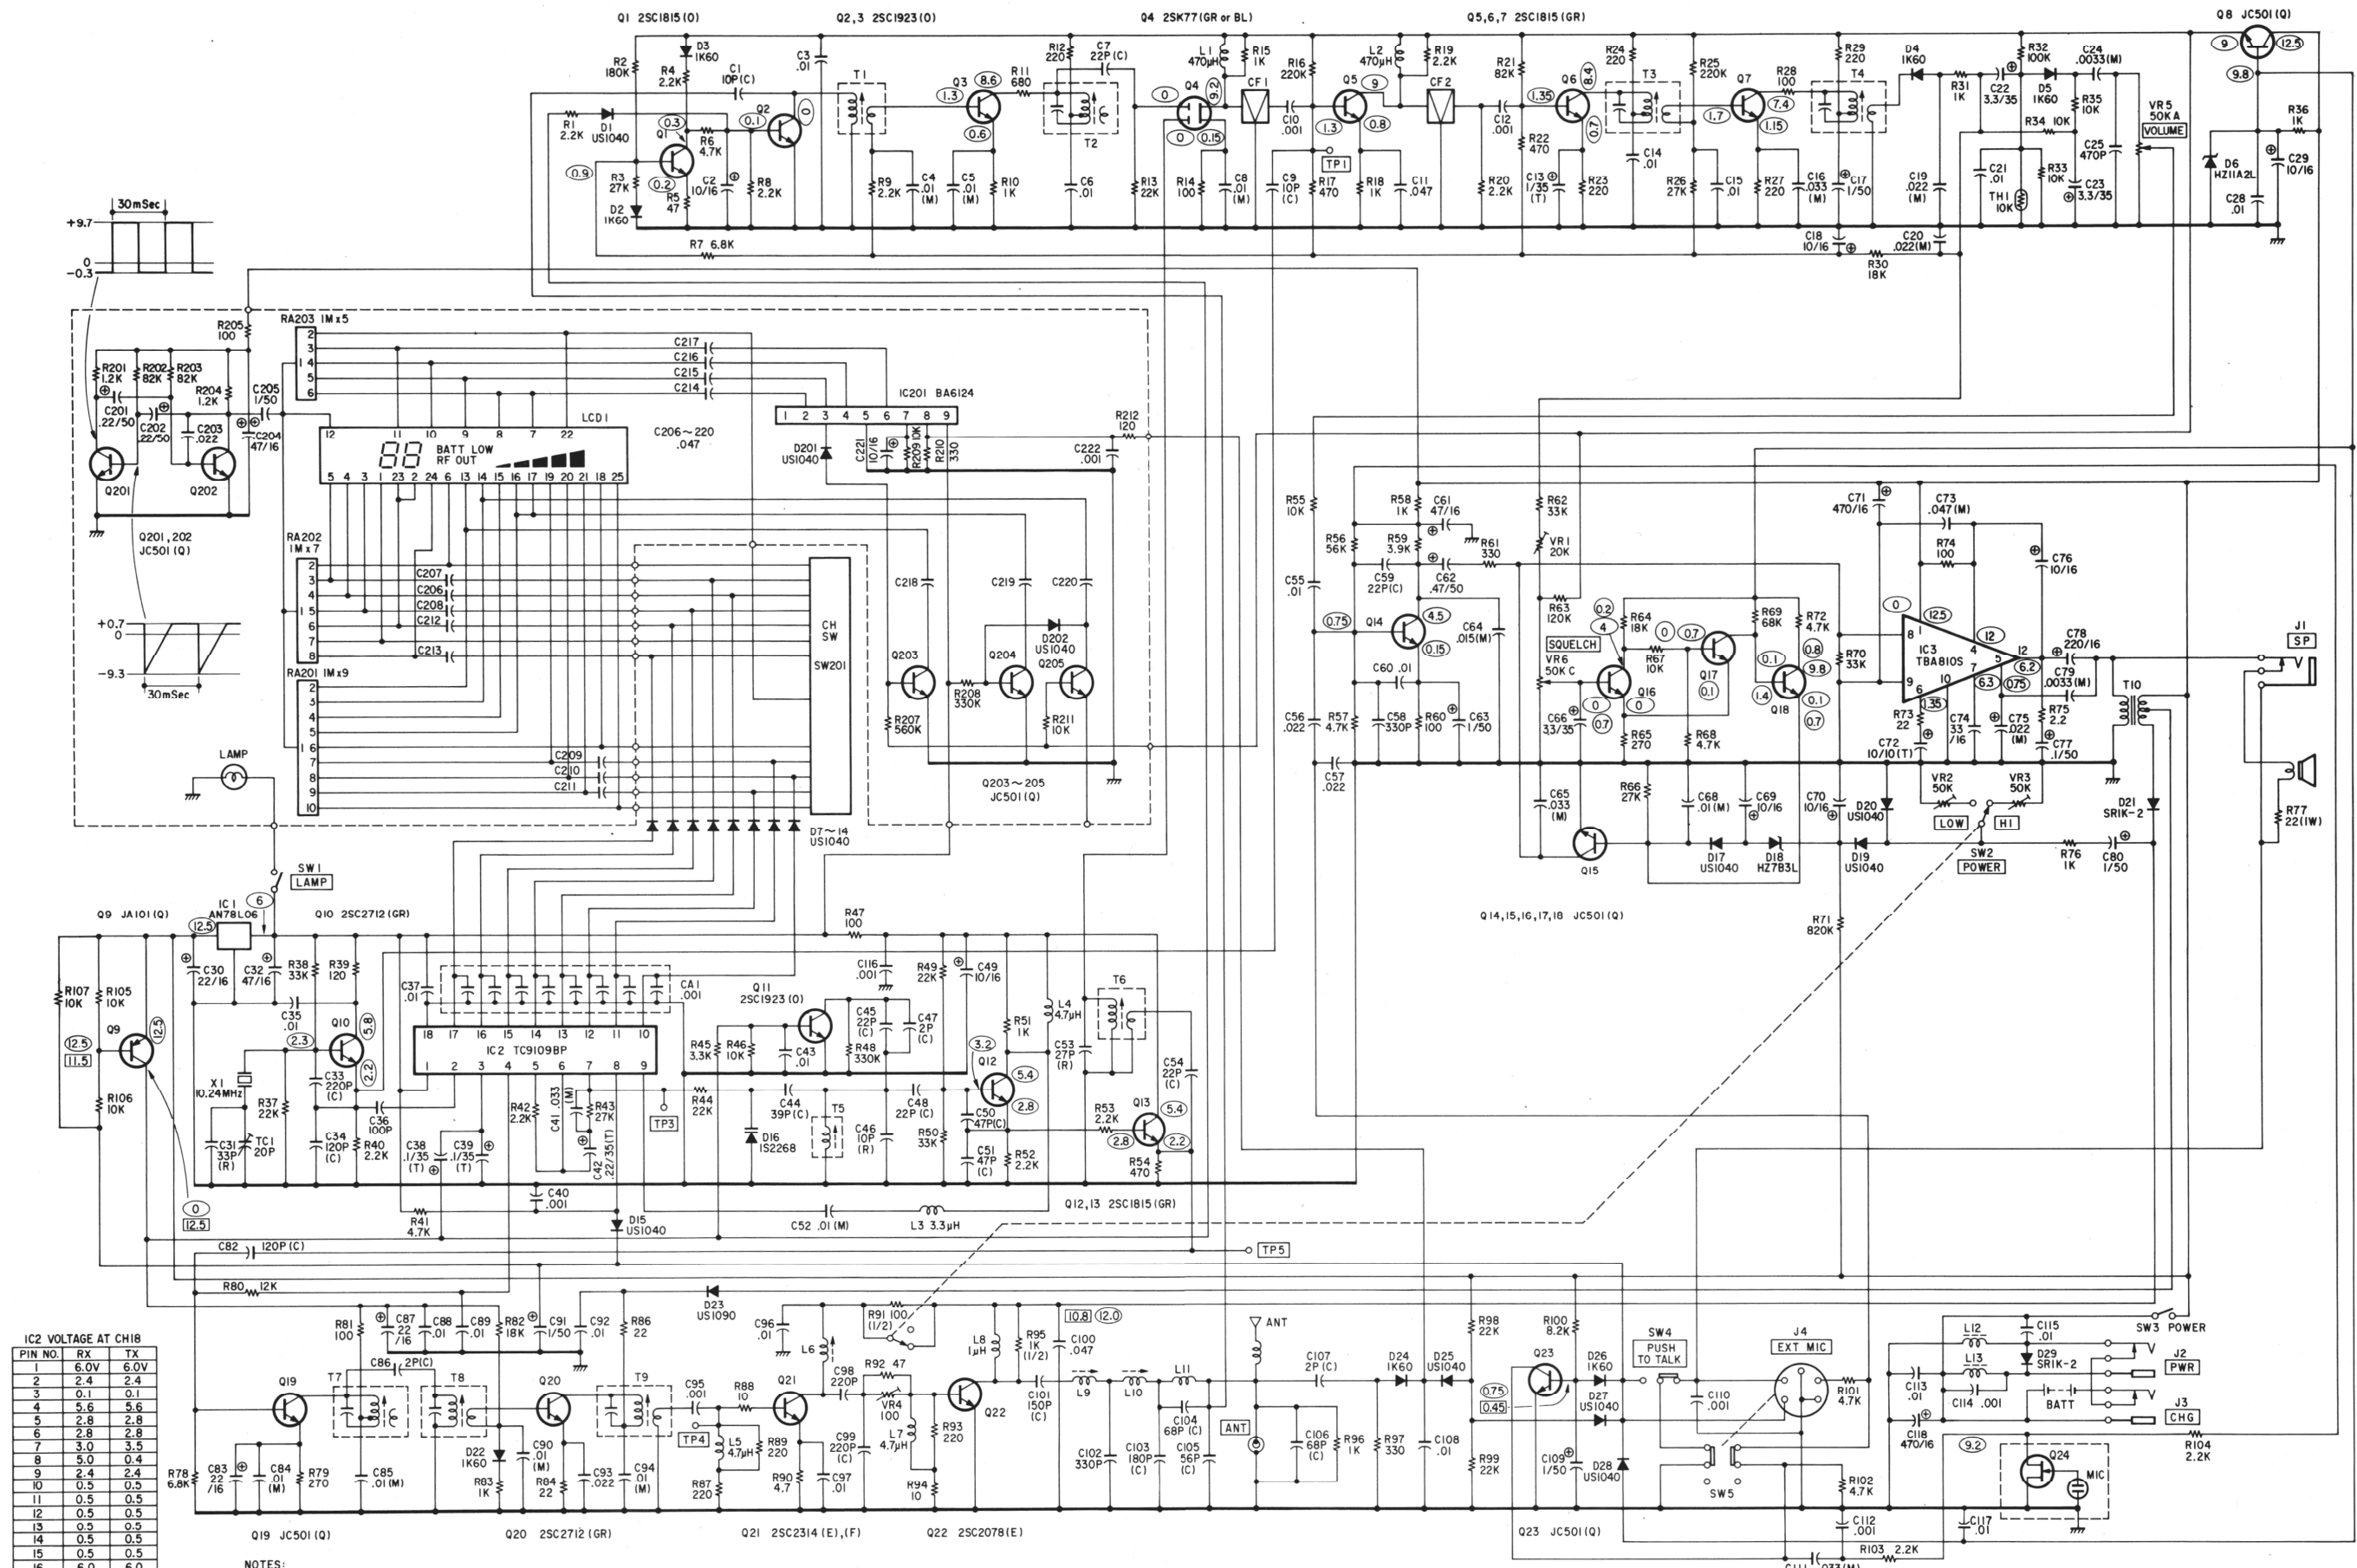

PIN NO.	RX	TX
1	6.0V	6.0V
2	2.4	2.4
3	0.1	0.1
4	5.6	5.6
5	2.8	2.8
6	2.8	2.8
7	3.0	3.5
8	5.0	0.4
9	2.4	2.4
10	0.5	0.5
11	0.5	0.5
12	0.5	0.5
13	0.5	0.5
14	0.5	0.5
15	0.5	0.5
16	6.0	6.0
17	6.0	6.0
18	0	0

- NOTES:
- ALL RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE SPECIFIED, K=1000, M=1000K
 - ALL CAPACITANCE VALUES ARE SHOWN IN MICROFARADS UNLESS OTHERWISE SPECIFIED, P=MICRO MICROFARADS
 - THIS SYMBOL INDICATES DC VOLTAGE MEASURED WITH SSVM UNDER THE FOLLOWING CONDITIONS: RECEIVE MODE: NO SIGNAL INPUT, VOLUME, MINIMUM AND SQUELCH "OUT"
 ○ THIS SYMBOL INDICATES DC VOLTAGE MEASURED WITH VTVM UNDER THE FOLLOWING CONDITIONS: VOLUME, MINIMUM AND SQUELCH "IN"
 □ THIS SYMBOL IS FOR TRANSMIT MODE VOLTAGES.