


SCHEMATIC DIAGRAM

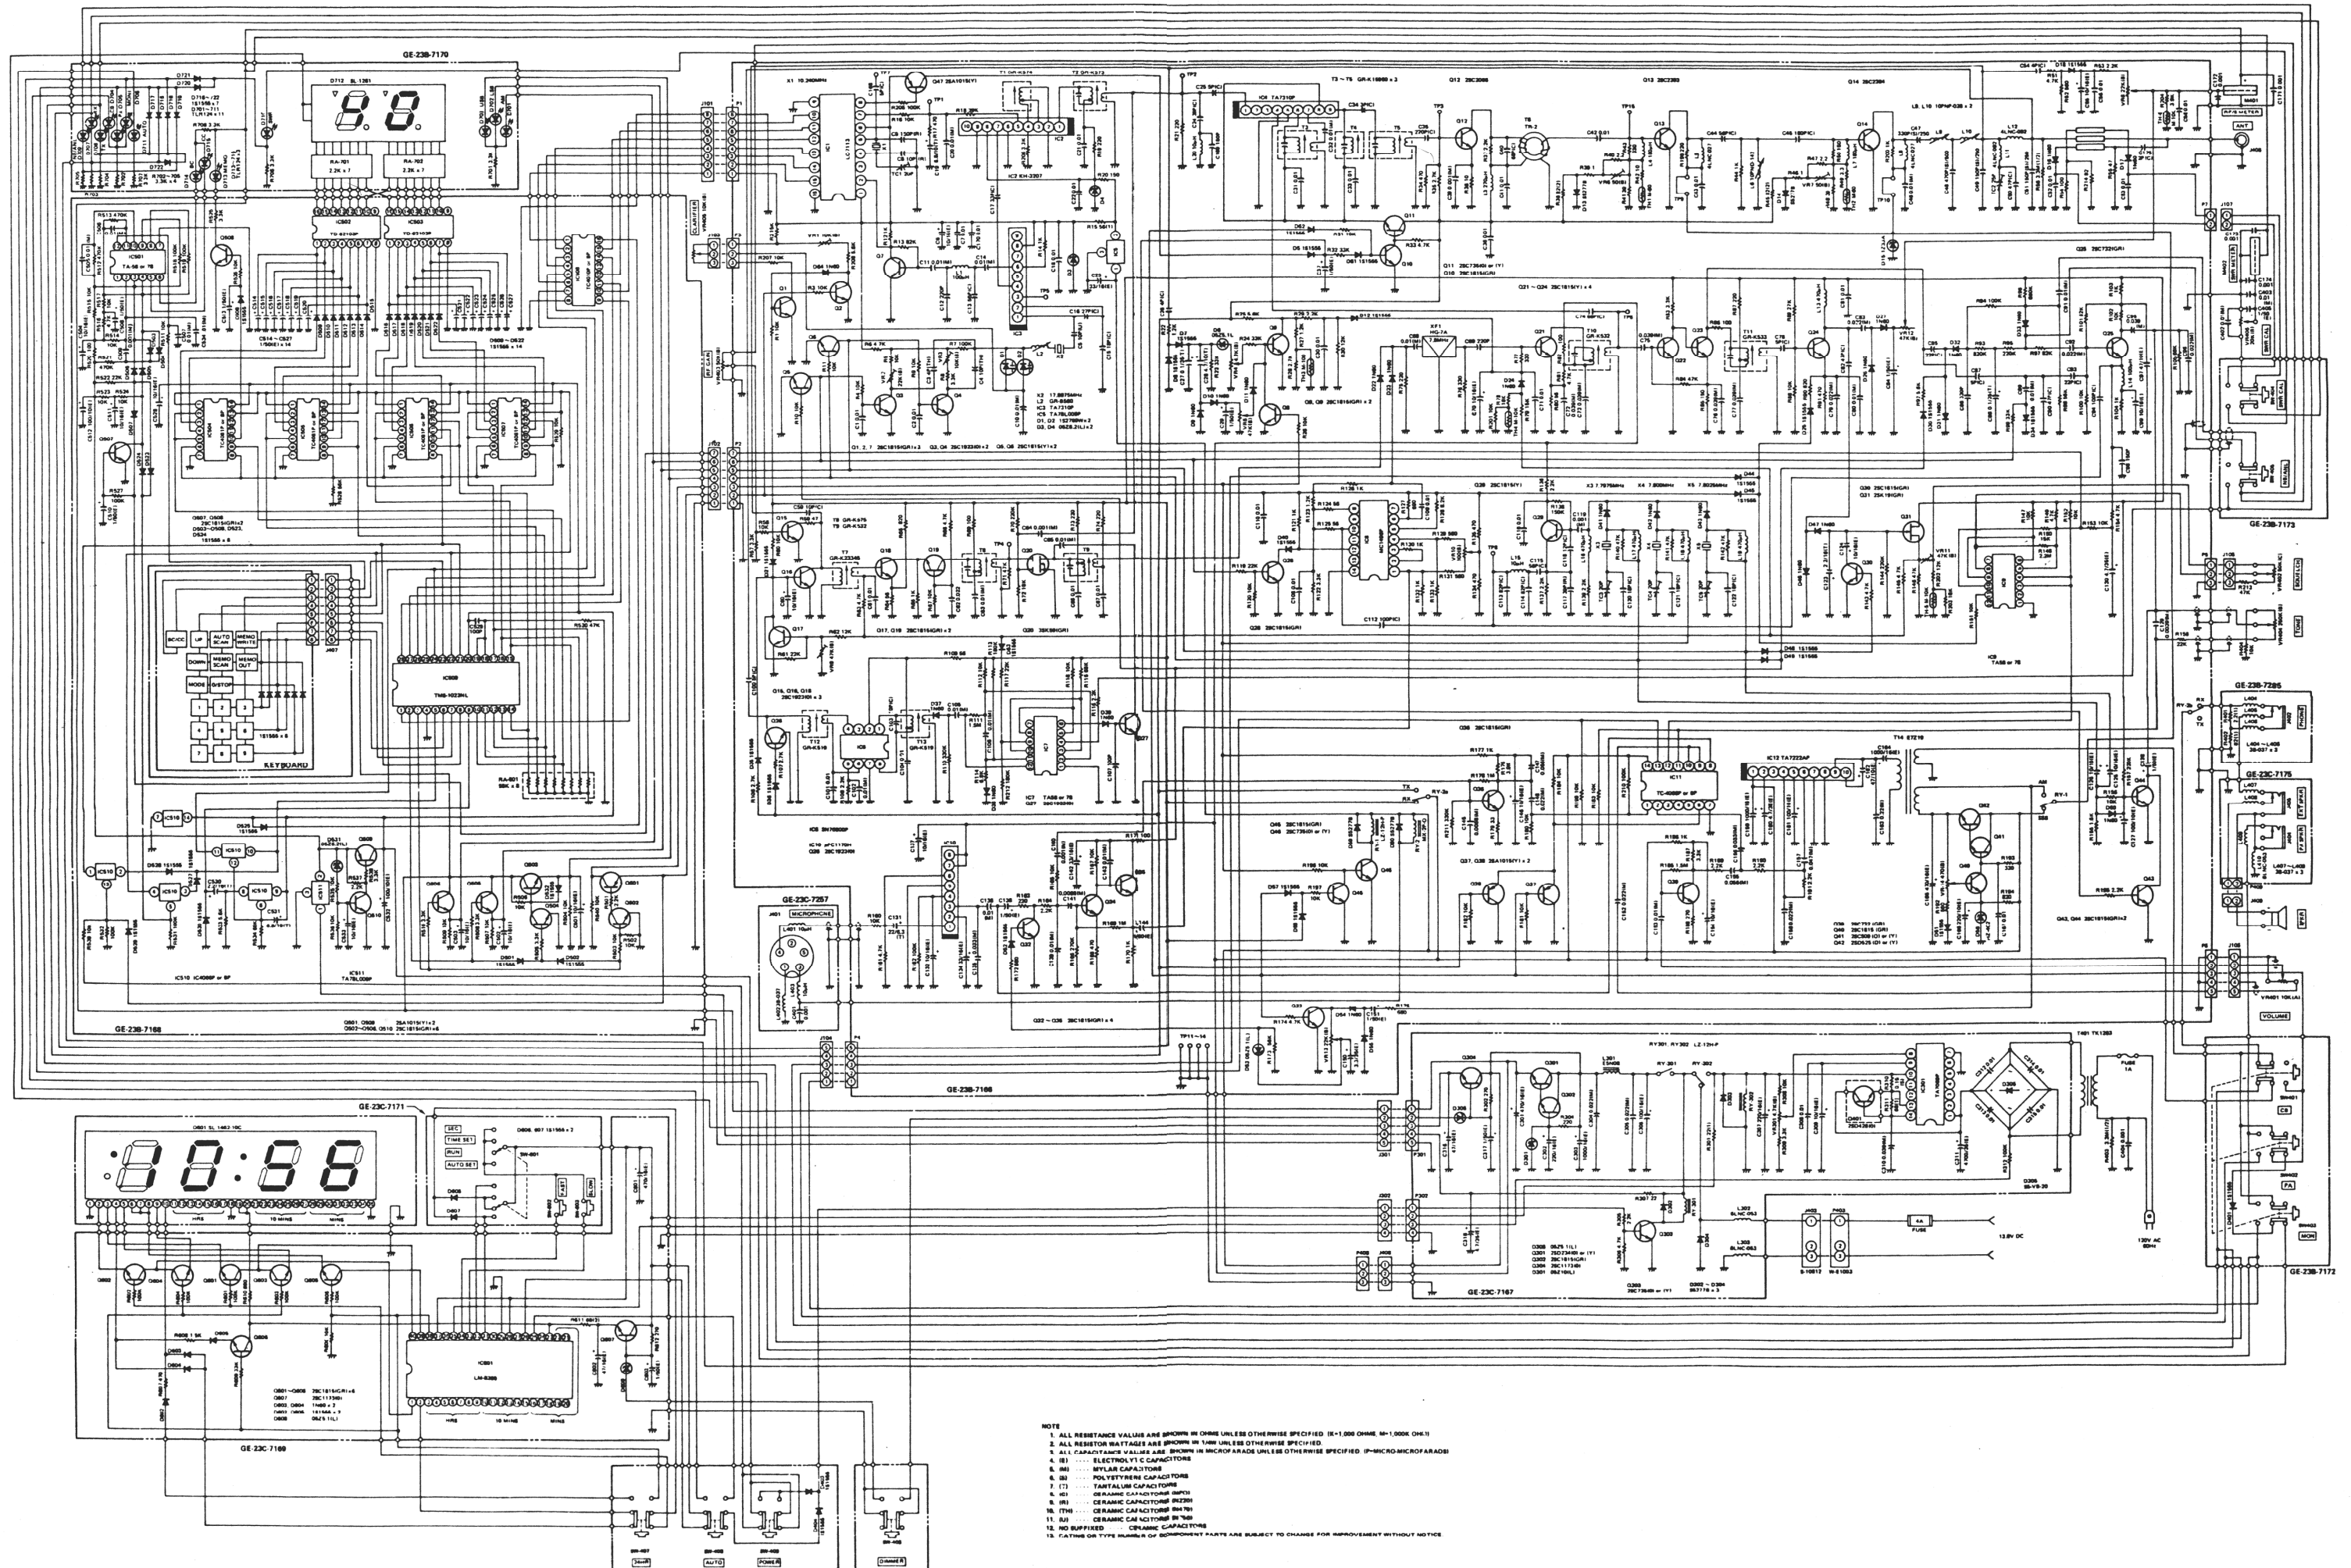

NOTE

1. ALL RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE SPECIFIED (K=1,000 OHMS, M=1,000K OHMS)
2. ALL RESISTOR RATINGS ARE SHOWN IN 1/4W UNLESS OTHERWISE SPECIFIED
3. ALL CAPACITANCE VALUES ARE SHOWN IN MICROFARADS UNLESS OTHERWISE SPECIFIED (P=PICTO-MICROFARADS)
4. (E) ELECTROLYTIC CAPACITORS
5. (M) MYLAR CAPACITORS
6. (P) POLYSTYRENE CAPACITORS
7. (T) TANTALUM CAPACITORS
8. (C) CERAMIC CAPACITORS (NP0)
9. (R) CERAMIC CAPACITORS (R220)
10. (TH) CERAMIC CAPACITORS (TH70)
11. (A) CERAMIC CAPACITORS (N750)
12. NO SUPPLIED CERAMIC CAPACITORS

† PARTS OR TYPE NUMBERS OF COMPONENT PARTS ARE SUBJECT TO CHANGE FOR IMPROVEMENT WITHOUT NOTICE