

ALL MEASUREMENTS MADE IN "RECEIVE" POSITION UNLESS OTHERWISE DESIGNATED.
 ▲ MEASURED IN "TRANSMIT" POSITION.


NUMBERS ASSIGNED TO COILS, SWITCHES, PLUGS, SOCKETS, AND TRANSFORMERS ARE TO FACILITATE CIRCUIT TRACING OR COMPONENT REPLACEMENT AND MAY NOT NECESSARILY BE FOUND ON THE UNIT.

● SEE PARTS LIST FOR ALTERNATE VALUE OR APPLICATION

- DC COIL RESISTANCE VALUES UNDER ONE OHM NOT SHOWN ON SCHEMATIC DIAGRAM
- DC voltage measurements taken with vacuum tube voltmeter.
 - Socket connections or transistor terminals are shown as bottom views.
 - Measured values are from socket pin or terminal to common ground.
 - Nominal tolerance on component values makes possible a variation of ±15% in voltage and resistance readings.
 - Volume control at maximum, no signal applied for voltage measurements.

A PHOTOFACIT STANDARD NOTATION SCHEMATIC with **CIRCUITRACE**

© Howard W. Sams & Co., Inc. 1962

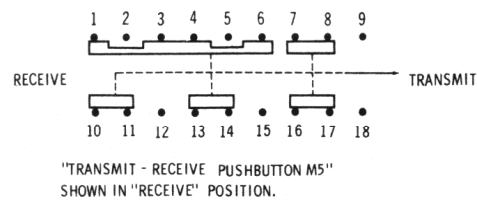

RESISTANCE MEASUREMENTS NOT GIVEN BECAUSE OF THE WIDE VARIATION IN INTERNAL TRANSISTOR RESISTANCE.

**SPOKESMAN
MODEL 700**