


PALOMAR SSB-500 MC145106P

1. Cut the trace on pins 10, 11, and 12 of the MC145106P chip.
2. Wire up 2 switches as shown below (we used Brite/Dim and CB/PA switches.)

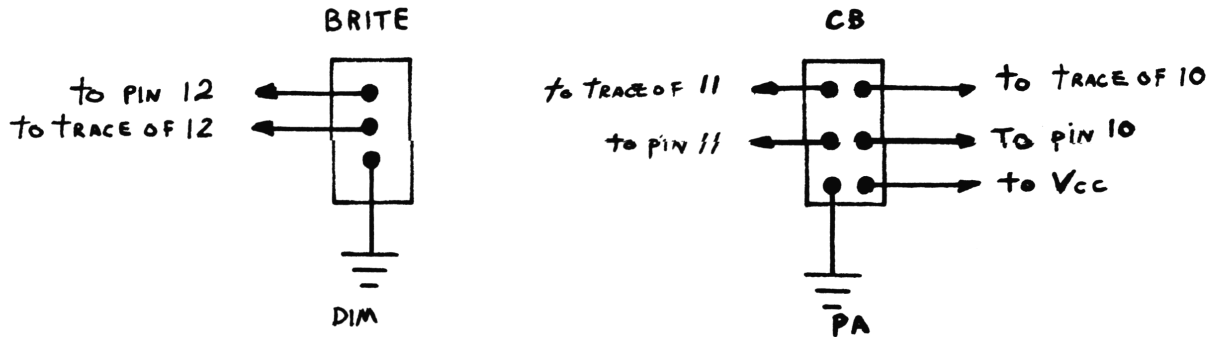

- A. Highs - PA
- B. Lows - DIM
- C. Medium Highs - PA & DIM

FREQUENCIES:

Channel	A	B	C	Channel	A	B	C
1.	27.605			17.	27.805	26.845	27.485
2.	27.615			18.	27.815	26.855	27.495
3.	27.625			19.	27.825	26.865	27.505
4.	27.645			20.	27.845	26.885	27.525
5.	27.655	26.695	27.335	21.	27.855	26.895	27.535
6.	27.665	26.705	27.345	22.	27.865	26.905	27.545
7.	27.675	26.715	27.355	23.	27.895	26.935	27.575
8.	27.695	26.735	27.375	24.	27.875	26.915	27.555
9.	27.705	26.745	27.385	25.	27.885	26.925	27.565
10.	27.715	26.755	27.395	26.	27.905	26.945	27.585
11.	27.725	26.765	27.405	27.	27.915	26.955	27.595
12.	27.745	26.775	27.425	28.	27.925	26.965	27.605
13.	27.755	26.785	27.435	29.	27.935	26.975	27.615
14.	27.765	26.795	27.445	30.	27.945	26.985	27.625
15.	27.775	26.805	27.455	31.	27.955	26.995	27.635
16.	27.795	26.815	27.475	32.	27.965	27.005	27.645
33-40					ALWAYS NORMAL		