

AM FREQUENCY EXPANSIONS

KRACO KCB4806


Jump pin 3 of A-006 PLL to pin 2 using a SPST switch. This yields 27.445-27.575 on channels 28-40.

MIDLAND 13-882C

(OR ANY 23 CH. AM O2A UNIT)

LOW FREQUENCIES:


1. Isolate pin 10 from pin 9.
2. Wire a SPDT Switch like this:

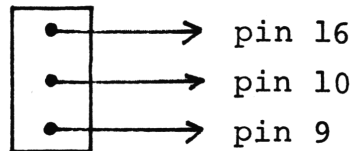

3. Switch UP for normal channels.
Switch DOWN for low channels.

23 CHANNEL O2A AM MODIFICATION

1. Locate and remove 11.806 MHz crystal.
2. Obtain an 11.905 MHz crystal.
3. Obtain a DPDT switch and wire as shown:

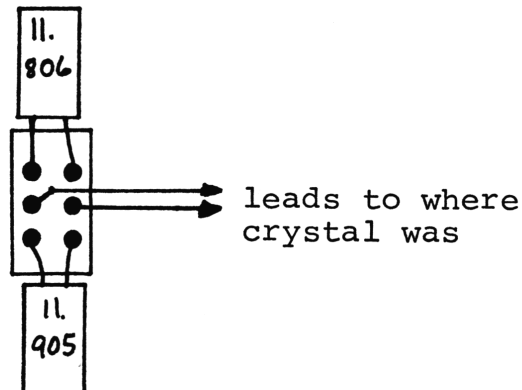

4. Use solid hook-up wire and keep leads as short as possible. Mount directly over crystal location.
5. This gives channels 26-55 on 1-23.