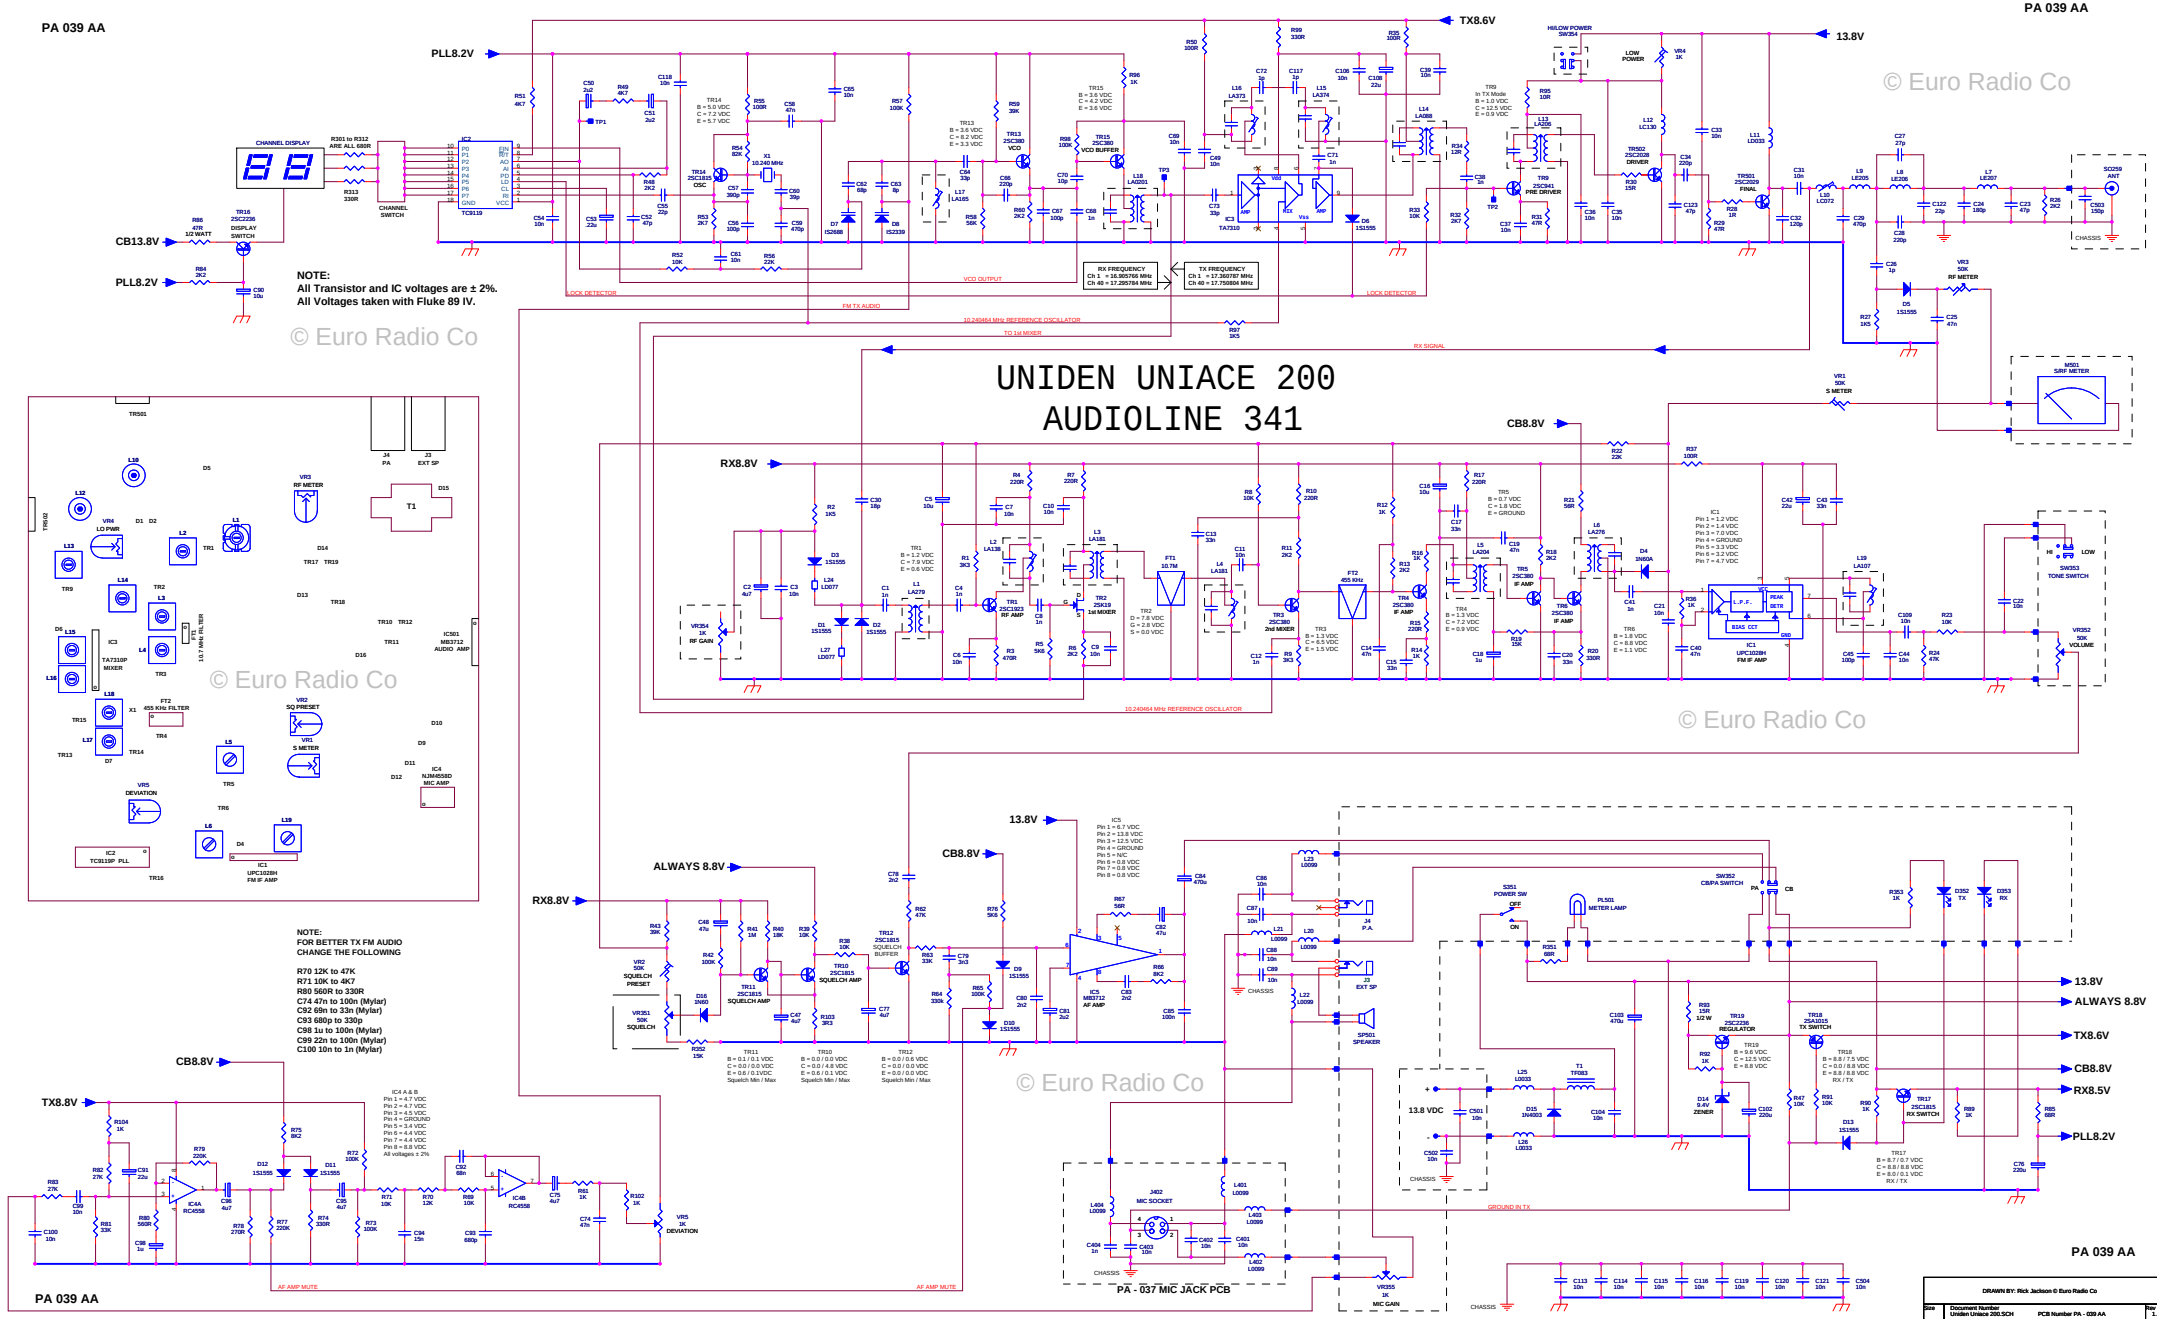
PA 039 AA
UNIDEN UNIACE 200
AUDIOLINE 341
NOTE:
All Transistor and IC voltages are ± 2%.
All Voltages taken with Fluke 89 IV.
© Euro Radio Co
PLL8.2V
TX8.6V
13.8V
CB13.8V
CB8.8V
RX8.8V
ALWAYS 8.8V
TX8.6V
CB8.8V
RX8.5V
PLL8.2V
NOTE:
FOR BETTER TX FM AUDIO
CHANGE THE FOLLOWING
R70 12K to 47K
R71 10K to 4K7
R80 560R to 330R
C74 47n to 100n (Mylar)
C92 68n to 33n (Mylar)
C93 680p to 330p
C98 1u to 100n (Mylar)
C99 22n to 100n (Mylar)
C100 10n to 1n (Mylar)
PA - 037 MIC JACK PCB
DRAWN BY: Rick Jackson © Euro Radio Co
Document Number: Uniden Uniace 200.SCH
PCB Number PA - 039 AA
Rev 1.1
Date: Thursday, January 03, 2008
Sheet 1 of 1