

SPECIFIC TUNEUPS

Midland 13-863B

RV1 - Sq. Rng; RV2 - AMC; RV3 - RX Meter; RV4 - TX Meter.
Tune L7, L8, and L9 for max forward on Ch. 12, has 2SC1306 final.

Pearce Simpson Tiger 23C

AMC defeat - D12; VR3 - TX Mtr; VR4 - Mod Mtr Adj; VR5 - RX Mtr;
VR6 - RF Gain; VR7 - Sq Rng. Tune L4, L5, L8, and L10 for max forward
on Ch 12, unit has 10W final.

Cobra 21 - 23 Ch.


VR1 - RF Gain; VR3 - Sq Rng; VR6 - TX Mtr; VR7 - RX Mtr; AMC defeat D24.
Tune L7, L10, L12, L13 for max forward on Ch. 12, has 2SC1239 final - 12.5W.

Mecca ECB-6, 23 Ch.

No I.D. #'s on board - AMC located, right front of large transformer.

JC Penny 981-6331 - 23 Ch. (No parts ID on PCB - see layout below.)

-NOT TO SCALE, REF. ONLY-

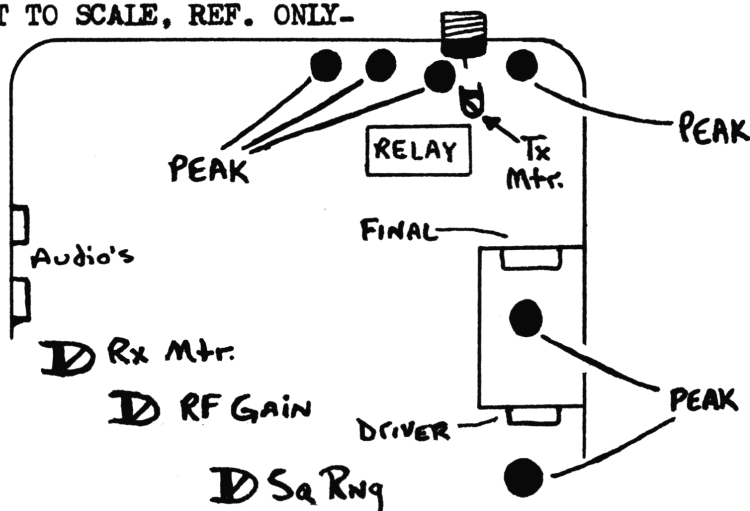

Peak all coils
for max forward
on Ch. 12.
(NO SAMS/SKEM.)
No AMC adjust or
defeat-known.
2SC1306 final,
will have solid 95%
mod. if tuned
right.

Sharp CB700 - 23 Ch. (No parts ID on PCB - see layout below.)

-NOT TO SCALE, REF ONLY..

Peak all coils shown for max forward
on Ch. 12. (AMC is marked Alc on PCB)
Unit has no meter, and no other adjust-
able pots.
"Don't exceed 3½ to 4W with present
Final - it will SMOKE IT!"
Has 2SC1909 final, change it to a
2SC1306.

